

XP Extreme Power

PERFORMANCE ENGINEERING SOLUTIONS



The XP-manual - Tuning for SAAB 92-96
Version 1.24.E-198, 2010-02

www.classicsaabracings.com

First page Picture;

The winning team at Le Mans Classic 2008.

Johan Josefsson, Bosse Lindman, Fredrik Tornerhielm, Göran Dahlén and Niklas Enander.

The replica of the car that competed at Le Mans 1959 won "Index of performance" in its class with cars from 1957 to 1961 all together about 70 cars.

Of all 400 attending cars the Le Mans 93 attained second place.

Beneath the hood rests a XP-tuned 748 cc 93-engine with XP-pistons, XP-crank + XP-rods, XP-throttle shaft and a specially optimized tuned XP-exhaust system, giving the engine 90 hp at 6'000 rpm. That is 120 hp per litre!

The car attained 177 km/h at almost 7'000 rpm at the end of the Mulsanne straight, still accelerating.

Contents

Introduction	6
<i>Personal presentation.....</i>	<i>6</i>
Function of the tuned 3 to 1 exhaust system.....	7
Building a tuned 3-1 XP-exhaust system.	11
Porting	15
<i>Exhaust port</i>	<i>15</i>
<i>Scavenge ports</i>	<i>17</i>
<i>Inlet port</i>	<i>20</i>
<i>Chamfering.....</i>	<i>21</i>
Compression ratio.....	22
Cranking pressure	25
Ignition.....	26
Sparkplugs.....	29
Jetting and Fuel	30
Two-stroke oil	33
EGT, Exhaust Gas Temperature.....	35
Cooling.....	39
<i>Water pumps.....</i>	<i>39</i>
<i>Cooling flow</i>	<i>41</i>
<i>Air flow</i>	<i>42</i>
Engine components.....	43
<i>SAAB 93-96 Crank.....</i>	<i>43</i>
<i>Pistons.....</i>	<i>45</i>
<i>Cylinder heads</i>	<i>49</i>
<i>Cylinder head gasket</i>	<i>51</i>
<i>Clutch.....</i>	<i>52</i>
<i>Flywheel.....</i>	<i>54</i>
<i>Exhaust manifold</i>	<i>56</i>
Carburettors.....	57
<i>Solex 32 AIC and Solex 32 BI</i>	<i>58</i>
<i>Solex 40 AI och Solex 40 BI</i>	<i>59</i>
<i>The longnose 65 carburettor Solex F40 BI</i>	<i>64</i>
<i>The tiple carburetor of the Sport 62-64, Solex 34 BIC</i>	<i>65</i>
<i>The triple carburettor on the standard 66-, Solex 34W2.....</i>	<i>68</i>
Performance	69
<i>Performance figures.....</i>	<i>69</i>
Tuning.....	70
<i>Chilton, Competition Tuning</i>	<i>70</i>
<i>SAAB Sport & Rally, Directions for competition modification of the Saab V4.....</i>	<i>77</i>
Torque data for bolts and nuts.....	106

XP-Products	107
<i>74,5 mm forged pistons, 2001-10-09</i>	<i>107</i>
<i>75 mm crank, 2002-01-04</i>	<i>108</i>
<i>Separate lube crank renovation, 2002-02-21</i>	<i>109</i>
<i>Ignitor for SAAB 2T, 2002-04-01</i>	<i>110</i>
<i>XP-throttle shaft, 2002-05-02</i>	<i>111</i>
<i>XP-Reed, 2002-05-06</i>	<i>112</i>
<i>Inlet manifolds, 2002-06-18</i>	<i>113</i>
<i>XP-triple throttle shaft, 2002-07-06</i>	<i>114</i>
<i>Sonett II flow, 2002-09-23</i>	<i>115</i>
<i>XP-Lancia throttle shaft, 2002-12-10</i>	<i>117</i>
<i>44mm XP-throttle house, 2002-12-23</i>	<i>118</i>
<i>XP-Clutch disc, 2003-01-08</i>	<i>121</i>
<i>XP-triple throttle house, 2003-01-21</i>	<i>122</i>
<i>Nylon bush kit, 2003-01-31</i>	<i>124</i>
<i>Sonett II flow 2, 2003-03-06</i>	<i>125</i>
<i>High compression cylinder head, 2003-04-13</i>	<i>126</i>
<i>XP Power pulley, 2003-05-16</i>	<i>127</i>
<i>Good news, 2003-10-29</i>	<i>128</i>
<i>9:36-Nurburg ring, 2003-11-14</i>	<i>129</i>
<i>XP Sport Power pulley, 2003-12-12</i>	<i>130</i>
<i>XP-Rear link bushings, 2004-01-04</i>	<i>131</i>
<i>Torsion vibration damper ring for SAAB Sport, 2004-01-27</i>	<i>132</i>
<i>XP-Lancia inlet manifold, 2004-01-27</i>	<i>133</i>
<i>SAAB Sport distributor drive gear pins, 2004-02-12</i>	<i>133</i>
<i>Ignition parts for 92 - 96, 2004-04-20</i>	<i>134</i>
<i>Chrome plated steel piston rings, 2004-06-17</i>	<i>134</i>
<i>New complete conrods, 2004-07-02</i>	<i>134</i>
<i>High strength cylinder head bolts, 2004-10-16</i>	<i>135</i>
<i>C3 and C4 drop gears, 2004-10-31</i>	<i>136</i>
<i>Offer on Ctek chargers, 2004-11-25</i>	<i>137</i>
<i>New complete conrods version 2, 2005-02-02</i>	<i>137</i>
<i>XP-throttle spindle Solex 44 PII, 2005-02-11</i>	<i>138</i>
<i>Lightweight XP-front windshield, 2005-02-25</i>	<i>138</i>
<i>Electric water pump, 2005-03-22</i>	<i>139</i>
<i>I have found some new parts, 2005-10-07</i>	<i>140</i>
<i>Four-bolt spindles, 2005-11-17</i>	<i>141</i>
<i>Lightweight XP-front windshield for SAAB V4, 2005-12-15</i>	<i>142</i>
<i>XP-operating cylinder, 2005-12-29</i>	<i>142</i>
<i>V4 clutch parts, 2006-02-06</i>	<i>142</i>
<i>XP-front end shims, 2006-02-09</i>	<i>144</i>
<i>2-stroke XP-flywheel version 2, 2006-02-09</i>	<i>145</i>
<i>Sport list clips, 2006-03-01</i>	<i>146</i>
<i>XP-crank webs for 77 mm stroke, 2006-03-02</i>	<i>147</i>
<i>XP-crank webs for 77 mm stroke, 2006-03-02</i>	<i>147</i>
<i>77 mm Stroker cranks for Sport/MC850 + 79 mm XP-crank, 2006-03-28</i>	<i>148</i>
<i>Cylinder head gasket V4, 2006-06-08</i>	<i>149</i>
<i>Retainer spring 7165681, 2006-06-15</i>	<i>150</i>
<i>Float chamber inserts for the Lancia 3PI, 2006-06-28</i>	<i>151</i>
<i>12 gram alloy valve spring retainers, 2006-07-26</i>	<i>151</i>
<i>Small Lambda gauge, 2006-07-28</i>	<i>153</i>
<i>Main Jets, 2006-09-01</i>	<i>154</i>
<i>Green-air filter for the Shortnose engine, 2006-09-01</i>	<i>155</i>
<i>Low speed jets, 2006-10-22</i>	<i>156</i>
<i>GT750 Water outlet pipe, 713151, 2006-10-24</i>	<i>157</i>
<i>XP-brake caliper adapters, 2006-12-07</i>	<i>158</i>
<i>Supertrapp additional silencer, 2007-01-30</i>	<i>159</i>
<i>SAAB Sport+ MC850 brake pads, 2007-01-30</i>	<i>160</i>
<i>Triple EGT gauge, 2007-02-01</i>	<i>161</i>
<i>Forged V4 pistons+ Stokers engine mounting bolts, 2007-02-16</i>	<i>162</i>
<i>9:38 final drive, 2007-02-16</i>	<i>163</i>
<i>9 gram hard-anodized alloy valve spring retainers, 2007-08-14</i>	<i>164</i>
<i>High compression cylinderhead gasket V4, 2007-08-30</i>	<i>165</i>
<i>Competition reinforcement kit's washer nuts, 2007-09-20</i>	<i>166</i>
<i>XP alu front end adjusting spacers, 2007-09-22</i>	<i>167</i>

<i>High strength push rods for SAAB V4, 2007-09-25</i>	168
<i>Alu push rods for SAAB V4, 2007-10-12</i>	169
<i>Competition reinforcement kit spring console, 2007-10-18</i>	170
<i>XP-Race radiator, 2007-11-03</i>	171
<i>Exhaust manifold gaskets SAAB 92 and 93-96 Stokers, 2008-01-24</i>	172
<i>Bolt on list clamps, 2008-01-25</i>	173
<i>Renovation/renovated oil pump Sport / MC850, 2008-01-25</i>	173
<i>Competition Homologated 4.5" "Ronald" rims, 2008-01-29</i>	175
<i>Lube oil additive, 2008-03-06</i>	175
<i>V4 race starter, 2008-03-06</i>	177
<i>V4 valve springs, 2008-04-05</i>	178
<i>Bonnet straps, 2008-07-08</i>	179
<i>Jets & jetting, 2008-08-04</i>	180
<i>Oil tin & Spot light holders, 2008-08-04</i>	181
<i>Special break parts, 2008-08-05</i>	182
<i>7:40 final drive, 2008-09-11</i>	183
<i>Long distributor V4, 2008-10-19</i>	184
<i>XP-power pulley V4, 2008-10-20</i>	185
<i>CNC XP-Ventures, 2009-01-29</i>	186
<i>XP-rocker arm shaft supports V4, 2009-02-03</i>	187
<i>XP-cam shafts 7.2, 7.6 and 8.3S, 2009-03-13</i>	188
<i>Bull nose cylinderhead on longnose block, 2009-04-02</i>	189
<i>Water inlet pipe adapter, 2009-04-03</i>	190
<i>9 gram hard-anodized alloy valve spring retainers, 2009-04-18</i>	191
<i>72 gram lifters, 2009-08-05</i>	192
<i>Cover plates and gaskets, 2009-08-06</i>	193
<i>Stainless steel braided brake lines for V4 brake system, 2009-12-23</i>	193
<i>K&N airfilterbox for the Lancia carburettor, 2009-12-30</i>	194
<i>SAAB 95 sheet strip rear fenders, 2010-01-20</i>	194
<i>M8 airplane nut, 2010-01-22</i>	195
<i>New parts in stock, 2010-01-22</i>	195
<i>Reinforcement plate Sport wheels, 2010-01-26</i>	196
References and some good stuff	197
Copy protection & Support	198

Introduction

You have now in your hand my tuning manual for SAAB's two stroke engines and their cars. This manual is intended to be a living document that continually improves and expands as knowledge and experience, both yours and mine, grows and is collected here.

Therefore you should not be surprised if some part seems unfinished, it will hopefully be bettered in due time.

In this manual I will contemplate on both simple and difficult things, but sometimes it is difficult to be simple so I will also use examples and diagrams.

The intention is that everyone shall be able to find something of value, both in the form of increased knowledge and in the form of increase horsepower's in their engine.

Your understanding of the two-stroke engine will hopefully increase and my intention is that you should cope with a simple calculator to find the right values for your own engine.

Personal presentation

My name is Niklas Enander and I have been driving two strokes ever since my first moped when I was eleven years old. I am presently working as a two-stroke engine simulation and research engineer at Husqvarna Engine Research in Jonsered outside Gothenburg after having worked with multicylinder engine development at Volvo and engine development at Volvo Truck.

I have over the years gained some experience with both my own and friend's two stroke engines in mopeds, scooters and SAAB's. I have studied a Master of Science degree in mechanical engineering at Chalmers and have there specialized in vehicles and engine lore.


At the moment I own about a dozen of two strokes some to mention is my first moped, a sprinter Vespa that beats a HD Sportster on the drag way, an office chair that does over 85 km/h, a 96 short nose, a black 93 with suicide doors, a 92 built for circuit racing, and regrettably not my beloved 21, my long nose from 65 that got seriously ill at the SAAB festival 2001 due to overpowering and under steering and has now gone to the last special course.

My personal reason to spend weeks of work on a manual like this is to be able to spread the knowledge of how to tune two stroke engines so that more people can hear the wonderful sound of a stroker that revs it way to the horizon.

By spreading this information I also get more information in return, and by charging a fee for my work I can motivate myself to spend the hours and get financing to develop new products for the SAAB tuner.

My goal is to put in at least two hours of work for every manual that is sold so that it will grow and develop and every new customer shall have some information that last month's customer did not get as well as you get the information that all previous customers paid to give you.

Function of the tuned 3 to 1 exhaust system

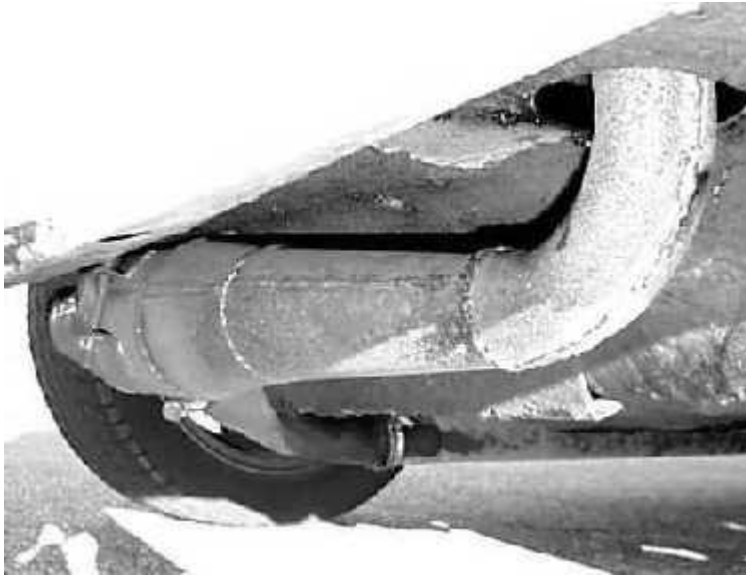

Tuned XP-exhaust system ready to go

The tuned 3-1-exhaust system works in two ways.

First it helps the engine to get rid of exhaust gas and secondly it helps the engine by putting back some of the scavenge loss that has entered the exhaust manifold. If we first study the tree cylinder two strokes with a common exhaust manifold it gets easier to understand how it does this.

On a standard 1965 engine the exhaust port is opened 49 mm below the top dead center, and the scavenge port is opened 59 mm below tdc. This gives an exhaust port duration of 155°, i.e. the exhaust port has the possibility to flow 155° of the total of 360° on one turn.

The scavenge ports opening 59 mm from tdc gives us a duration of 116°.

The blow down period, the period from exhaust opening to scavenge opening is then

$$(155-116)/2 = 19,5^\circ$$

This also means that the exhaust port is open 19,5° after that the piston, on its way up on the compression stroke, has closed the scavenge port.

We can now see that the engine is able to empty itself of pure exhausts during the first 19,5° of the exhaust port opening and during the remaining 135,5 degrees there is also the possibility for scavenge losses of air and fuel to leave the cylinder.

As the engine has three cylinders with evenly spaced ignition timings, we know that the next exhaust port will open $360/3= 120$ degrees after the last one.

If we now assume that cylinder 1 is just opening its exhaust port, that has a duration of 155 degrees, then we also know that the cylinder 2 will open its exhaust port when cylinder 1 has $155-120= 35$ degrees left until it is closed again.

As cylinder 2 is opening and expelling its exhaust gasses a pressure wave is formed that with the speed of sound spreads itself through the exhaust manifold to cylinder one. When the pressure wave reaches cylinder one the pressure in the exhaust manifold exceeds the pressure in the cylinder and some of the fresh charge that has escaped the cylinder is pressed back in the cylinder.

The fact that this portion of fresh charge is pressed back is the reason why the SAAB three-cylinder engine in standard form has relatively low fuel consumption and a high and wide torque curve around 3000-4000 rpm.

As the pressure wave, that is rather short, travels with the speed of sound, the time it takes to travel from cylinder to cylinder is about the same independent of the speed of the engine.

This means that the wave will arrive too early to do any good at really low engine speeds and when you rev a standard engine over 5000 rpm it arrives too late to do any good so the engine power drops and it has not enough torque to rev any further under load.

The standard exhaust system gives an exhaust backpressure that is comparably high to counter high scavenge losses and thus it gives low fuel consumption. But it also gives too high back pressure at maximum power and the engine is not able to breathe as freely as one would like.

This is usually countered by the SAAB tuner by using a sports exhaust with two standard diameter exhaust pipes or an 2" pipe that will get free breathing exhaust with higher power at the cost of higher fuel consumption.

The exhaust system that was recommended by SAAB in the end of the sixties consists of a modified SAAB Sport front silencer with a suction cone and a 2" exhaust pipe under the car to minimize the exhaust backpressure. The suction cone that is not longer than about 10 cm has an end diameter of about 8 cm. Until this day I have not seen a tuning instruction where the measures actually are written down.

When a pressure wave reaches a wall, like in a closed pipe, the wave bounces back as a reflection of itself and with the same sign, like a pressure pulse turns back as a pressure pulse. If you instead of a wall close the pipe with a cone the bounce will be extended to a lower but a longer returning pressure wave. In the same way a pressure wave that reaches a cone that increases in diameter is reflected back as a suction wave.

Such a cone was previously called a megaphone but is now suction cone as it is not the end of the system.

When the pressure wave from the exhaust port opening reaches the suction cone in the SAAB's tuning system a suction wave that is designed to reach the cylinder around the bottom dead center at around 5000 rpm is sent back. The suction pulse eases the scavenging and gives a higher airflow and higher power. The problem is that at 4000 rpm the suction comes too early to do any good and at 6000 rpm it's almost too late.

The exhaust system that is recommended by SAAB has a perforated reverse cone after the suction cone. This reverse cone has the purpose to destroy the remaining pressure waves in the system, otherwise there would be a sharp reflection against the front silencer's rear wall.

It is very common to choke modern mopeds with a plate in the exhaust system that has an opening of half of the pipe area. That means that half of the pressure wave is reflected back as suction wave from the hole, and so you have cut off the reflection and killed the tuning in the exhaust system.

The function for the reverse cone with holes, is to break the remaining pressure waves in the exhaust system in much the same way.

In the XP-system there is no such cone, because these reflections are used to reach a higher engine power.

In the tuned 3-1 XP exhaust system the exhaust pipe area begins to expand already from the exhaust manifold. This early expansion sends back a prolonged suction wave to the cylinder and assists it to empty its exhausts. The suction cone is further separated in two sections to get a larger width of the tuned rpm's.

After a straight section comes a reverse cone that sends back a pressure wave to the cylinder. This pressure wave is added on to the pressure wave from the nearest ignited cylinder and assists in lowering the scavenge losses by increasing the pressure in the exhaust port towards the end of the scavenging before the exhaust port closes.

The pressure wave from the XP exhaust system is tuned towards working at higher rpm to widen the drivable area and to raise the engine power.

If we reach the same torque, but at 10 % higher engine speed, we will get 10 % higher power.

The pressure wave can even manage to push back some of the fuel and air that has escaped in to the exhaust manifold.

As the mixture is detained in the cylinder the engine power goes up as well as the fuel consumption is lowered.

The exhaust back pressure from the exhaust system also assists in holding scavenge gases in the cylinder, but if the back pressure becomes too high the engine will not be able to successfully flush out the exhaust from the cylinder, and the engine will lose power at high rpm's. A large amount of exhaust gases remaining in the cylinder will heat the scavenge gases and cause knocking and holed or ceased pistons.

The reason to using a 2" system instead of an original 34 mm system is because the backpressure in the front silencer is about half with a 2" system.

I have measured backpressure towards 0,18 kilos with an original exhaust system.

Generally on a tuned two-stroke pipe, the silencer stinger diameter is 0,6 to 0,7 times the diameter of the exhaust port.

On a really tuned group II engine the area of the exhaust port corresponds to a diameter of 42 mm which gives a recommended end diameter of 25 to 29 mm on a tuned pipe.

As these recommendations are on an engine with one pipe per cylinder we should have an area of three times this and will thus have an exhaust pipe diameter of some 44-50 mm. As a 2" system usually has an inner diameter of 51 mm it seems to be a good choice. The diameter seems a bit big, but it is compensated by its great length.


If one would choose a diameter lesser than 44 mm on a highly tuned engine the risk for knocking and overheated pistons is evident.

The sport systems two pipes of 34 mm has an area of a pipe with a diameter of 34 mm times the root of two which is 48 mm and that corresponds well with later recommendations.

Reverse cone

The templates for the tuned XP exhaust system for group II tuned engines contains two different designs of the reverse cone.

One is symmetrical and 170 mm long. This cone gives you the best torque at 4000 rpm but the exhaust system becomes so long that one might be forced to trim the edge of the wheel house and it is possible that you will get tire contact when turning the wheels as far as possible in a left turn if you use big tires.

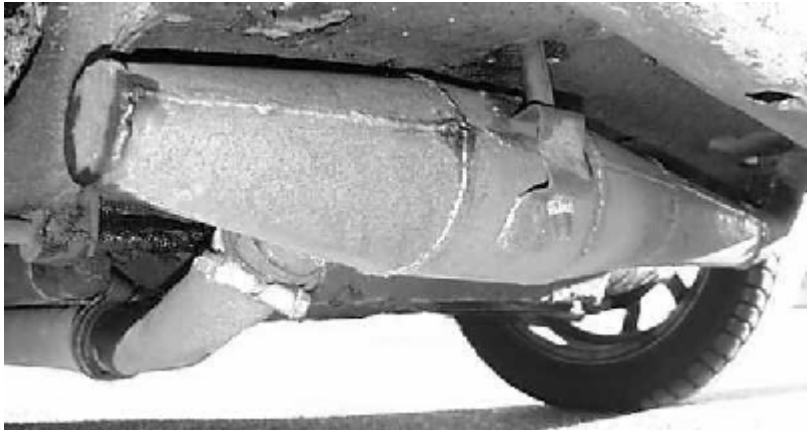

XP-exhaust system with the long reverse cone

To avoid these collisions there is also a second asymmetrical reverse cone that has one side that is parallel with the straight pipe.

This reverse cone should allow the system to be fitted without risk of interference with the wheelhouse and the straight sidewall makes it easier to fit the adapter for your 2" pipe.



XP-exhaust system with the short asymmetrical reverse cone

The short asymmetrical cone also makes it easier to end the system with a 2" pipe straight out from the end of the cone. The problem is though that the amplitude of the pressure waves is twice as high there as in the straight section so the system becomes VERY noisy.

Don't forget the big advantage of a silent exhaust and intake is besides comfort, the increased possibility to hear the engine knocking and therefore maybe you will save yourself a lot of agony.

Copy protection & Support

This tuning manual and templates have been under production for a long time and represents many years of work and research.

The person that has bought this manual and building instruction has the right to contact me for further consultation concerning their tuning. I also urge you to contact me with information that you miss or find faulty so that the manual can be continually improved.

I also very much like to hear the results from your tuning and also to receive tips on where to find further information.

As you can see I show you in the references where you can find some nice material.

But no one has the right to copy this manual and templates.

If you wish to receive it you simply send me a letter with your name, address, email and phone number and enclose 700 sek, 90 USD or 70 € .

I will then arrange for a copy to be sent as soon as it is printed which usually is done monthly.

I can promise that there will be goodies in the future for them who do not misuse my trust to publish this material.

This is both in planned publications and in further parts for the driven SAAB-tuner.

To be continued.

Yours XP-Niklas Enander

Tanks for help, information, ideas and inspiration to:

Gösta Andersson, Jakob Axelsson, Ola Backer, David Barrow, Joel Berneklev, Marlene Bro, Peter Bäckström, Tore Claesson, Sonny Dahlberg, Göran Dahlén, Fredrik Ekendahl, Ronnie "Generalen" Eriksson, Truls Herland, Andreas Hillby, Nicolina Hübert, Anders Jenssen, Rolf Jenssen, Johan Josefsson, Esbjörn Ollas, Bosse Lindman, Bernt "75:an" Olsson, Chris Partington, Fredrik Wildt-Persson, Carl-Magnus Skogh, Bengt-Erik Ström, Frank "SQR" Strömqvist, Fredrik Tornérhielm, Hans Willbrant och Robin Wästberg.